






- For CATV indoor use.
- All F female connector.
- Input/output impedance 75Ω.
- Designed SMD technology achieves high stability.
- RFI shielded metal housing with ABS plastic frames.
- With equalizers and adjustable control this amplifier provide correct signal level.

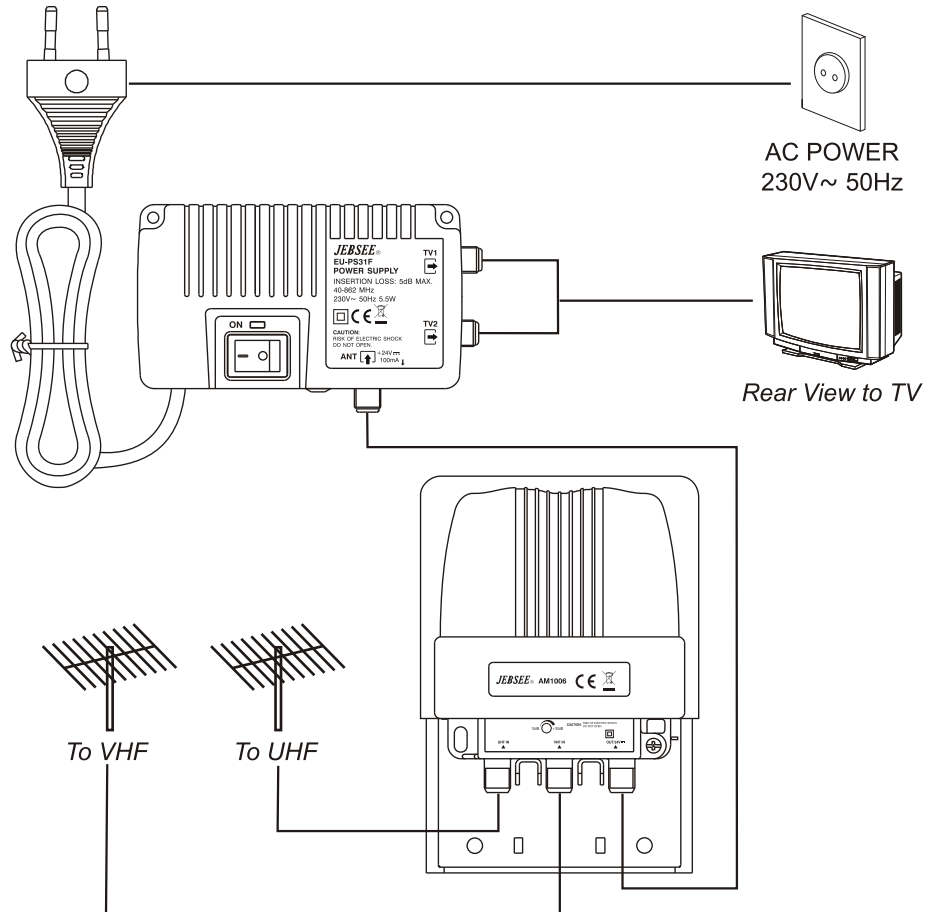

● SPECIFICATIONS

FREQUENCY RANGE	170-230	470-862
GAIN	30dB	35dB
GAIN CONTROL	0~20	0~15
NOISE FIGURE	3.5dB Max.	3.5dB Max.
INPUT RETURN LOSS	5NOR 3dB MIN.	5NOR 3dB MIN.
OUTPUT RETURN LOSS	6dB MIN.	6dB MIN.
MIN. output level DIN 45004B		
disturbance 3 order intermod.60dB(dBμV)	103dBμV	
POWER SUPPLY	230V~ 50Hz 6W	 

● BLOCK DIAGRAM

